

OFFICE OF THE EXECUTIVE ENGINEER JAL SHAKTI (PHE) DIVISION QAZIGUND

Allotment Order No: PHQ/CC/ 134 of 2022-23 dated 28/12/2022

No: PHQ/ 5855-57 DATE: 28/12/2022

NAME : Abdul Rashid Lone S/o Ghulam. Ahmad Lone R/o Shankerpura

email: loneg999@hotmail.com

Cell No.8493939612

REGD. NO:SE/Hyd/Sgr/AAY/Class-94/Civil/Sanitary of 2004-05

ACCOUNT NO:

GSTN: 01ABHPL0415C1Z1

PAN: ABHPL0415C

Name of Schemes:-Laying and fitting of pipes and Construction of chain link fencing , construction of Anchor block for supporting pipes at spots for water supply scheme Zalloora Under JJM)

Administrative Approval No.

59-DB of 2022

Dated:-

20-07-2022

Technical Sanction No.( issued by S.E)

168-DB of 2022

Dated:-

22-08-2022

Alloted Cost; Rs:- 2618493/=

Rupees :- Twenty Six Lacs eighteen thousands four Hundred and Ninety Three Only

Completion Time

90 Days

References:1. Executive Engineer Jal Shakti (PHE) Division Qazigund for e-NIT No. PHQ/37\_OF 2022-23 Dated:30-11-2022 issued under Dispatch No.PHQ/CC/5260-74 Dated:- 30-11-2022( Tender ID No. 2022\_PHE\_198048\_6)

For & on behalf of Lt. Governor of J&K , contract for above noted work is here by fixed with you on your quoted percentage rates, terms & conditions and are reproduced hereunder:-

Sl. No.	Description of Work / Item(s)	Qty	Unit	Rate	Amount
1	Earth work in excavation by manual means in trenches for foundations, drains, pipes, cables etc. (not exceeding 1.5 m in width) and for shafts, wells, cesspits and the like not exceeding 10 sqm on plan, including dressing of sides and ramming of bottoms lift upto 1.5 m, including getting out excavated earth and disposal of surplus excavated earth as directed:				
1.01	All kinds of soil	1374.100	Cum	436.000	599107.60
1.02	Ordinary Rock	142.600	Cum	841.600	120012.16
2	Laying and fitting of G.I. pipes (all classes) complete, including cost of pipe spacial, excluding cost of pipes, and Earth work				0.00
2.01	80 mm dia GI pipe	800.000	Mtr	73.050	58440.00
2.02	65 mm dia GI pipe	500.000	Mtr	73.050	36525.00
2.03	50 mm dia GI pipe	1000.000	Mtr	40.800	40800.00
2.04	40 mm dia GI pipe	600.000	Mtr	40.800	24480.00
2.05	25 mm dia GI pipe	2000.000	Mtr	30.650	61300.00
2.06	20 mm dia GI pipe	1000.000	Mtr	20.250	20250.00
2.07	15 mm dia GI pipe	2500.000	Mtr	20.250	50625.00

*[Signature]*  
T.O

*[Signature]*  
Xen

SH H.D  
*[Signature]*

3	Filling available excavated earth (excluding rock) in trenches, plinth, sides of foundations etc. in layers not exceeding 20 cm in depth, consolidating each deposited layer by ramming and watering, lead upto 50 m and lift upto 1.5 m	1283.400	Cum	198.700	255011.58
4	Installation of house hold connections to unconnected households including providing and fixing of necessary pipes specials, earth work at connections whatever necessary.	24.000	No	1500.000	36000.00
5	Laying in position centrifugally cast (spun) iron S&S or flanged pipes (excluding cost of pipe) ( 100 mm dia DI Pipe)	79.050	Qtl	245.550	19410.73
6	Providing push-on-joints to Centrifugally (Spun) Cast Iron Pipes or Ductile Iron Pipes including testing of joints and including the cost of rubber gasket( 100 mm dia DI Pipe)	91.000	Joints	89.700	8162.70
7	Providing and fixing C.I. double acting air valve of approved quality with bolts, nuts, rubber insertions etc. complete (The tail pieces, tapers etc. if required will be paid separately)	6.000	No	5147.150	30882.90
8	Making connection of G.I. distribution branch with G.I. main of following sizes by providing and fixing Tee, including cutting and threading the pipe etc. complete				0.00
8.01	25 to 40 mm nominal bore	12.000	Each	666.250	7995.00
8.02	50 to 80 mm nominal bore	3.000	Each	1268.750	3806.25
9	Earth work in bulk excavation by manual means over areas (exceeding 30 cm in depth, 1.5 m in width as well as 10 m <sup>2</sup> on plan) including disposal of excavated earth lead upto 50 meters and lift upto 1.5 m, as directed by Engineer-in-Charge				0.00
10	Providing and laying of stone boulders tightly hand picked on horizontal levels	13.500	Cum	678.040	9153.54
11	Providing and laying in position cement concrete of specified grade including curing but excluding the cost of centring and shuttering. All work upto plinth level with(1:4:8 (1 cement : 4 coarse sand : 8 graded stone aggregate 40 mm nominal size	13.500	Cum	4861.835	65634.77

*[Handwritten signature]*  
T.O

*[Handwritten signature]*  
V.S.

*[Handwritten signature]*

12	Providing and laying in position cement concrete of specified grade including curing but excluding the cost of centring and shuttering. All work upto plinth level with (1:2:4 (1 cement : 2 coarse sand : 4 graded stone aggregate 20 mm nominal size)	40.250	Cum	5437.520	218860.18
13	Providing and laying in position specified grade of reinforced cement concrete including curing but excluding the cost of centering, shuttering, finishing and reinforcement. All works upto plinth level (1:1½:3 (1 cement : 1½ coarse sand : 3 graded stone aggregate 20 mm nominal size)	10.100	Cum	7800.760	78787.68
14	Reinforced cement concrete work in walls (any thickness) including attached pilasters, buttresses, plinth and string courses, fillets, columns, pillars, piers, abutments, posts and struts upto floor five level including curing but excluding cost of centering shuttering, finishing and reinforcement (1:1½:3 (1 cement : 1½ coarse sand : 3 graded stone aggregate 20 mm nominal size)	20.040	Cum	9408.135	188539.03
15	Steel reinforcement for R.C.C. work including straightening, cutting, bending, placing in position and binding all complete above/upto plinth level Thermo-Mechanically Treated bars	1831.000	Kg	87.157	159584.47
16	Structural steel work in single section, fixed with or without connecting plate, including cutting, hoisting, fixing in position and applying a priming coat of approved steel primer all complete	2278.000	Kg	91.025	207354.95
17	Centering and shuttering including strutting, propping etc. and removal of form for:				0.00
17.01	Foundations, footings, bases of columns etc. for mass concrete.	99.800	Sqm	288.530	28795.29
17.02	Retaining walls, return walls, walls (any thickness) including attached pilasters buttresses, plinth and string course fillets, kerbs and steps etc	216.000	Sqm	631.235	136346.76
18	2mm Cement plaster of mix:1 : 6 ( 1 cement : 6 fine sand)	216.600	Sqm	265.925	57599.36

*[Handwritten signature]*  
T-0

*[Handwritten signature]*  
Xen

84 H.D  
*[Handwritten initials]*


19	Providing and fixing G.I. chain link fabric fencing of required width in mesh size 50x50 mm including strengthening with 2 mm dia wire or nuts, bolts and washers as required complete as per the direction of Engineer-in charge.	174.600	Sqm	806.850	140876.01	
20	Painting with synthetic enamel paint of approved brand and manufacture to give an even shade( Including priming coate)	126.000	Sqm	199.595	25148.97	
21	Steel work welded in built up sections/framed work, including cutting, hoisting, fixing in position and applying a priming coat of approved steel primer using structural steel etc. as required.	270.000	Kg	146.630	39590.10	
22	Carriage of material from source to dumping site at road by mechanical transport.				0.00	
22.01	Cement & steel for avg. lead of Km	40	30.520	MT	511.049	15597.22
22.02	Sand for avg. lead of Km	50	40.650	Cum	669.922	27232.33
22.03	20mm Aggregate for avg. lead of Km	25	79.710	Cum	432.322	34460.39
22.04	40mm Aggregate for avg. lead of Km	25	12.100	Cum	469.931	5686.17
22.05	Stone solling For avg lead of km	10	13.500	Cum	316.052	4266.70
23	Extra carrage of matterial from dumping site up to actual site of work by mannual labours 300 mtr					0.00
23.01	Cement		10.590	MT	201.586	2134.80
23.02	steel		1.800	MT	433.004	779.41
23.03	sand and 20 mm aggregade		59.300	Cum	419.342	24866.98
23.04	40 mm aggregade		4.900	Cum	453.332	2221.33
23.05	stone solling		5.500	Cum	493.328	2713.30
24	Carriage of pipes from divisional store up to actual site of work by M.T Avg lead 10 Km					0.00
24.01	100 mm dia DI Pipe		500.000	Mtr	6.130	3065.00
24.02	80/65/50/40/25/20/15 mm dia GI pipe		21.460	MT	249.654	5357.57
25	Carriage of pipes from dumping site to actual site of work by mannual labour for an Avg lead 500 mtr .					0.00


*[Handwritten signature]*  
1.0

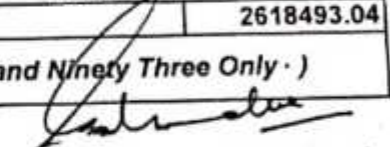
*[Handwritten signature]*  
Xm

25.01	100 mm dia DI Pipe	500.000	Mtr	9.603	4801.50
25.02	50/40/25/20/15 mm dia GI pipe	21.460	MT	355.695	7633.21
<b>G.TOTAL</b>					<b>2869895.92</b>
<b>Quated Percentage rate</b>				<b>8.76%</b>	<b>Below</b>
<b>Alloted Cost</b>					<b>2618493.04</b>

*(Rupees Twenty Six Lacs eighteen thousands four Hundred and Ninety Three Only . )*

 **Head Draftsman**

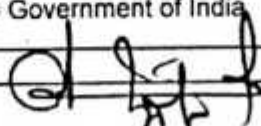
  
**Tech Officer**

  
**Ex. Engineer PHE Div. Qazigund**

**Terms & Conditions**

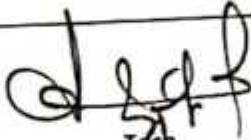
- 1 The cost of work is restricted to Rs.2618493/= ( Twenty Six Lacs eighteen thousands four Hundred and Ninety Three Only )
- 2 Earnest money deposited by you vide CDR No. 3379617 dated:- 12-12-2022 of Rs.57500/= and CDR No. 3379625 dated:- 17-12-2022 of Rs. 29000/= in JK Bank Larkiporea is being retained as security deposit and shall be released after as per the general terms and condition of the Contract
- 3 The allotted works shall be subject to check by the third party monitoring agency (TPIQM) appointed by the Department. The agency shall check the quality of works executed by the agencies, the quality of materials used for construction and the quality of machinery installed in each scheme. The TPIQM's role shall be that of an assistant to the Employer's Representative for the purpose of monitoring and evaluating of the performance of the Contract during the Contract Period
- 4 Agency must execute the works as per the requirements/specifications detailed in the relevant/applicable IS code/s
- 5 The rates are including the charges for submission of progress, Geo tagged photographs through the professional person before , during and after construction and progress reports in both hard and soft copies .
- 6 The date of start of work shall be reckoned within one week form the date of issue of LOI / Contract Allotment whichever is earlier.
- 7 No price escalation will be paid for completion of the work within the stipulated time or extended date of completion due to any reasons whatsoever.
- 8 In case of quantity variation OR required as per the direction of the Engineer in charge , the same has to be executed at site and nothing extra will be paid beyond the overall allotted cost.
- 9 Retention many / Security deposit shall be 10% of the contract value . The security deposit is to be recovered @ of 10% of bill amount from running account bills and shall be released after completion of the work and recommandation from the concerned Engineer in charge

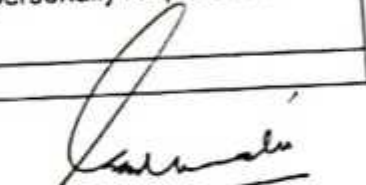
10	Liquidated damages (LD): In the event of allottee failing, declining, neglecting or delaying the supplies / works or in the event of any damage occurring or being caused by the allottee or in the event of any default or failure by the allottee in complying with any of the terms and conditions of the contract, the Department shall with or without prejudice to any other remedies available to it under any law for the time being enforce in the UT: a) Terminate the contract after 15 days' notice and/or b) Recover the amount of loss caused by damage, failure or default, as may be determined by the department and/or c) Recover the extra cost, if any, involved in allotting contract to other party and/or d) Impose Liquidated damages on account of delay beyond the schedule completion period to the tune of 0.5% of the delayed portion of contract every week but not exceeding 10% value of the contract and/or e) Forfeit the performance security and blacklist the firm.
11	Adequate precautions be taken for the environment and social protection and all safety practices in vogue be strictly adhered to during the execution of work.
12	No mobilization advance shall be paid.
13	The Agency shall be responsible for the time and proper setting out of all the works and for the correctness of the positions, levels, dimensions and alignment of all parts of the works and for the provision of all necessary instruments, appliances and labour in connection therewith.
14	The Agency shall make his own arrangements for the engagement of all types of the labour, required for the execution of the job. No workman below the age of 18 years shall be employed on the works. Also the bidder shall comply with the provisions of all labour laws and the rules framed there under.
15	The Agency shall at his own cost make arrangements for proper storage, especially towards Rain and Snow damages of the equipment/ materials at sites till its erection/completion. For the purpose, the bidder shall, with the approval of the Engineer in charge construct temporary storage accommodation for equipment/ material at site for which land shall be provided by the department near the site of work.
16	The Agency shall in connection with the work provide and maintain at his own cost all lights, guards, fencing and watching, when and where necessary or required by the Department for the protection of the work or safety and convenience of the Public etc
17	The Agency shall in advance communicate with incharge store keeper, of Divisional Store for lifting of pipe material etc and shall make adquate measures like avaiability of transport and labour for easy transportation from store to site against proper receipt / Challan, if required .
18	As soon as letter of award is communicated to the firm, the contract shall be complete and binding upon them, the Agency/firm shall also be required to execute an agreement with the competent authority within seven days from the date of issue of letter of award. Failure to execute such an agreement in time shall not however, prevent this contract from being enforced against the firm and the date of delivery of the material/completion of works shall be reckoned from the date of issue of the letter of award .
19	All other terms and conditions as laid down in the detailed NIT/SBD/ PWD Form No.25 double /GFR 2017/Manual for procurement of Works 2019 shall remain in force and binding upon the Agency.
20	Any rules/terms and conditions, if not stipulated in the bidding document, shall be strictly dealt in accordance with the relevant rules/guidelines stipulated in the General Finance Rules (GFR 2017) and Manual for procurement of Works 2019 Government of India
Copy to the :-	



2	Superintending Engineer Hydraulic Circle Anantnag for information.
3	Assistant Executive Engineer Jal Shakti (PHE) Sub-Division Dooru for information & necessary action. He will ensure the completion of work within the stipulated time period and strictly in accordance with approved proposals of JJM, besides the amount of work does not exceed beyond the provision of allotment in any case for which he shall be personally responsible.
4	File concerned.

Head Draftsman  


  
 Tech.  
 Officer

  
 Ex. Engineer PHE Div. Qazigund