

Office of the Executive Engineer (JSD) P.H.E Division Awantipora

E-Mail ID: pbedivisionawantipora@gmail.com

Name: M/S Farooq Ahmad Bhat
 S/O: Rustum Bhat
 R/O: Tral
 Reg. No. : A-01/ORTIC/2003-04
 GST No.01AKFPB4676C1ZS
 PAN No.: AKFPB4676C1

No.PHA/ 2068-02
 Dated: 07/07/2022

Subject:-Retrofitting of of water supply scheme Amirabad by way of laying and fitting, intake chamber under UM

- Reference:-
1. Your tender in response to this office E-NIT No. 04/PHA of 2022-23 (e- tendering) issued under endorsement No.PHA/Awp/204-15 dated:- 16-04-2022Tender ID :2022_PHE_166887__21
 2. Minutes of meeting DJJM Pulwama held on 14-06-2022.
 3. *Technical Specification No. 21/JJM of 07/2022*

For on behalf of lieutenant Governor of Union Territory of Jammu & Kashmir, contract for above mentioned work is hereby fixed with you at the following quoted rates, terms conditions .

Advertised Cost:-Rs 28.49 lacs

Allotted Cost:- Rs 27.98 lacs

(Rupees twenty seven lacs and ninety eight thousand) only

S.N o.	Particulars of items	Unit	Qty	Allotted Rate	Amount	
					in figures	in Words
1	Earth work in excavation by manual means in trenches for foundations, drains, pipes, cables etc. (not exceeding 1.5 m in width) and for shafts, wells, cesspits and the like not exceeding 10 sqm on plan, including dressing of sides and ramming of bottoms lift upto 1.5 m, including getting out excavated earth and disposal of surplus excavated earth as directed. All kinds of soil (1 meter from cutting edge).	cum	1830	428.152	697887.76	Rupees Six Lakh NinetySeven Thousand Eight Hundred EightySeven Paise SeventySix Only
2	Laying and fitting of G.I. pipes complete with G.I. fittings excluding trenching and refilling etc. (external work). Light 100 mm dia Gi Pipes	joint	32	1227.5	39280	Rupees ThirtyNine Thousand Two Hundred Eighty Only
3	80 mm dia Gi Pipes	joint	32	1080.2	34566.4	Rupees ThirtyFour Thousand Five Hundred SixtySix Paise Forty Only
4	50 mm dia Gi Pipes	mtr	300	40.0656	12019.68	Rupees Twelve Thousand Nineteen Paise SixtyEight Only
5	40 mm dia Gi Pipes	mtr	400	40.0656	16026.24	Rupees Sixteen Thousand TwentySix Paise TwentyFour Only
6	25 mm dia Gi Pipes	mtr	500	30.0983	15049.15	Rupees Fifteen Thousand FortyNine Paise Fifteen Only

g

Ricard

70

Subject:-Retrofitting of of water supply scheme Amirabad by way of laying and fitting, in chamber under JJM

Subje

7	20 mm dia GI Pipes	mtr	640	19.8855	12726.72	Rupees Thousand Hundred Paise Six Only
8	15 mm dia GI Pipes	mtr	4860	19.8855	96643.53	Rupees Thousand Hundred Forty Three Paise Fifty Three Only
9	Providing and laying S&S Centrifugally Cast (Spun)/ Ductile Iron Pipes conforming to IS 8329 150 mm dia Ductile Iron Class K - 7 Pipes	Qti	309	241.1301	74509.2099	Rupees SeventyFour Thousand Five Hundred Nine Paise Twenty Only
10	Providing push-on-joints to centrifugally (Spun) Cast Iron Pipes or Ductile Iron Pipes including testing of joints.	joint	264	142.0954	37513.1856	Rupees Thirtysix Thousand Five Hundred Thirteen Paise Nineteen Only
11	Making connection of G.I. distribution branch with G.I. main of following sizes by providing and fixing Tee, including cutting and threading the pipe etc. complete 25 to 40 mm nominal bore	each	15	654.2575	9813.8625	Rupees Nine Thousand Eight Hundred Thirteen Paise EightySix Only
12	50 to 80 mm nominal bore	each	4	1245.9125	4983.65	Rupees Four Thousand Nine Hundred EightyThree Paise SixtyFive Only
13	Providing and laying of stone soiling (dully hand packed) on horizontal level.	cum	16.0544	589.2	9459.25248	Rupees Nine Thousand Four Hundred FiftyNine Paise TwentyFive Only
14	Providing and laying in position cement concrete of specified grade including curing but excluding the cost of centring and shuttering. All work upto plinth level with: 1:4:8 (1 cement : 4 coarse sand : 8 graded stone aggregate 40mm nominal size)	cum	11.538	4774.3219	55086.12689	Rupees FiftyFive Thousand EightySix Paise Thirteen Only
16	Providing and laying in position specified grade of reinforced cement concrete including curing but excluding the cost of centering, shuttering, finishing and reinforcement. All works upto plinth level: 1:1.5:3 (1 cement : 1.5 coarse sand : 3 graded stone aggregate 20 mm nominal size)	cum	24.3111	9237.8704	224583.3454	Rupees Two Lakh TwentyFour Thousand Five Hundred EightyThree Paise ThirtyFive Only
17	Reinforced cement concrete work in walls (any thickness) including attached pilasters, buttresses, plinth and string courses, fidets, columns, pillars, piers, abutments, posts and struts upto floor five level including curing, but excluding cost of centering shuttering, finishing and reinforcement: 1:1½:3 (1 cement : 1½ coarse sand : 3 graded stone aggregate 20 mm nominal size)	cum	25.293	9672.0567	244635.3324	Rupees Two Lakh FortyFour Thousand Six Hundred ThirtyFive Paise ThirtyThree Only
18	Centering, shuttering including strutting, propping etc and removal of form for: Foundation, footings, bases of columns etc. for mass concrete.	sqm	16.92	257.5786	4358.259612	Rupees Four Thousand Three Hundred FiftyEight Paise Twenty Three Only
19	Walls (any thickness) including attached pilasters, buttresses, plinth and string courses etc.	sqm	453	563.5207	255044.9607	Rupees Two Lakh FiftyFive Thousand FortyFour Paise NinetySix Only

Handwritten signatures and initials at the bottom right of the page.

Subject:-Retrofitting of of water supply scheme Amirabad by way of laying and fitting, intake chamber under JJM

20	Suspended floors, roofs, landings, balconies, and access platform.	sqm	36	624.1592	22753.34914	Rupees TwentyTwo Thousand Seven Hundred FiftyThree Paise ThirtyFive Only
21	Edges of slabs and breaks in floors and walls. Under 20cms wide	Mtr	2	237.9386	513.947376	Rupees Five Hundred Thirteen Paise NinetyFive Only
22	12mm Cement plaster finished with a floating coat of neat cement of mix: 1 : 4(1 cement : 4 fine sand)	sqm	202	280.90601	56657.61859	Rupees FiftySix Thousand Six Hundred FiftySeven Paise SixtyTwo Only
23	Reinforcement for RCC works including cutting, straightening, binding All complete	kg	3800	85.60585	325302.23	Rupees Three Lakh TwentyFive Thousand Three Hundred Two Paise TwentyThree Only
24	Structural Steel for MS Ladder & Lid	kg	190	100.29657	19056.3483	Rupees Nineteen Thousand FiftySix Paise ThirtyFive Only
25	Filling available excavated earth (excluding rock) in trenches	cum	1024.0	195.1234	199806.3616	Rupees One Lakh NinetyNine Thousand Eight Hundred Six Paise ThirtySix Only
26	Carriage of different materials from different sources to dumping site of work by Mechanical Transport including loading, unloading, stacking etc: Cement, and Steel for an average lead of 5 km	MT	33.09	180.05559	5957.438154	Rupees Five Thousand Nine Hundred FiftySeven Paise FourtyFour Only
	Pipe from Avg Lead of 16 Kms	%m	15.86	1221.9026	19379.37524	Rupees Nineteen Thousand Three Hundred SeventyNine Paise ThirtyEight Only
	Pipe from Avg Lead of 12 Kms	MT	12.30	266.36799	3275.905428	Rupees Three Thousand Two Hundred SeventyFive Paise NinetyOne Only
	Sand for an average lead of 20 km.	cum	47.95	443.83748	21280.53569	Rupees TwentyOne Thousand Two Hundred Eighty Paise FiftyFour Only
	20mm aggregate avg lead 20km	cum	65.41	443.83748	29033.51552	Rupees TwentyNine Thousand ThirtyThree Paise FiftyTwo Only
	40mm agg average lead of 20 km.	cum	25.26	299.41130	7563.488959	Rupees Seven Thousand Five Hundred SixtyThree Paise FourtyNine Only
	Stone Soling for an average lead of 5 km.	cum	25.16	168.84164	4247.718055	Rupees Four Thousand Two Hundred FourtySeven Paise SeventyTwo Only
27	Extra Carriage of different materials from dumping site to actual site of work by manual labour including loading, unloading, stacking etc: for an average lead of 800 mtr Pipes	MT	12.30	481.82713	5925.712511	Rupees Five Thousand Nine Hundred TwentyFive Paise SeventyOne Only
	Pipe from Avg Lead of 900 m	%m	15.86	2002.2489	31755.66755	Rupees ThirtyOne Thousand Seven Hundred FiftyFive Paise SixtySeven Only

Subject-Retrofitting of of water supply scheme Amirabad by way of laying and fitting chamber under JJM

P-3

Cement for an average lead of 1000 m.	MT	28.70	570.18357	16363.42518	Rupees Seven Thousand Two Hundred Sixty Four Paise Only
Steel for an average lead of 1000 m.	MT	4.56	971.33351	4427.997507	Rupees Four Thousand Four Hundred Twenty Eight Only
Sand/20 mm agg.for an average lead of 1000	cum	113.36	1058.8090	120028.1109	Rupees One Lakh Twenty Thousand Twenty Eight Paise Eleven Only
40mm agg. average lead of 1000 m	cum	25.26	1144.6246	28914.59097	Rupees Twenty Eight Thousand Nine Hundred Fourteen Paise Fifty Nine Only
Stone Soling for an average lead of 1000 m	cum	25.16	1245.1435	31325.32254	Rupees Thirty One Thousand Three Hundred Twenty Five Paise Thirty Two Only
Total:-				Rs 27.98 lacs	

Rates & Quantity Checked

Head Draftsman


Terms Conditions:-

1. The cost of work in no case exceed beyond Rs 27.98 lacs(Rupees twenty seven lacs and ninety eight thousand) only
2. Bid declaration security @ 2% vide CDR No.3249240 Dated:-10-05-2022 for an amount of Rs 58000 (J&K Bank Tral) are being retained as security deposit shall be released only after successful completion of the work expiry of defective period
3. Time of completion is essence of the contract
4. The work shall have to be started by you at site immediately and ensure its successful completion within a period of 04 months from the date of issuance of allotment from this office strictly in accordance with the approved proposals falling which the work shall have to be got executed through any other means at your risk and cost, besides CDR deposited by you as security against this contract shall be forfeited. However date of start for laying and fitting of pipes will start within 07 days from the date of issuance of pipe material by the deptt.
5. An agreement shall have to be drawn up by you with the department within a period of 07 days from the date of issuance of allotment failure to execute such a formal deed shall not however prevent the contract from being enforced upon you.
6. The allotted works shall be subject to check by the third party monitoring agency appointed by the department.
7. Payment shall be released as per actual / measured work done not less than 20% of the allotted cost on a monthly basis.
8. Performance security equivalent to 3% of the value of the contract shall have to be deposited by you in shape of CDR/FDR/bank Guarantee within one week of issuance of allotment order and valid for a period of 3 months beyond the expiry of warranty period of the contract.

(Handwritten signatures and initials)


9. The firm shall be bound for satisfactory performance of works for 18 months after the successful commissioning of the works. If during warranty period any malfunctioning / defects arise, you shall have to rectify same within a period of 10 days of receipt of intimation. In case of any failure on your part, the department may get the defects removed / repaired by any other means and cost thereof shall be recovered from you and shall be recommended for further punitive action as governed under the relevant clause of the contract including black listing.
10. Pre & post Geo-tagged photographic evidence be taken during the execution of the work and shall have to be produced at the time of submission of the bill.
11. The quantity allotted shall have to be executed on ground strictly as per the estimates that have been framed in the DPR for the item of "L/F, intake chamber, construction of spring protection collection sump".
12. All other terms and conditions shall be applicable as laid down in standard bid document and PWD from No. 25/33.
13. Any rules / terms and conditions if not stipulated in the bidding documents, shall be strictly dealt in accordance with the relevant rules / guidelines stipulated in General Financial Rules (GFR-2017) and manual for procurement of works 2019 G.O.I.

Head Draftsman



Tech/Officer

Executive Engineer
(JSD) PHE Division Awantipora

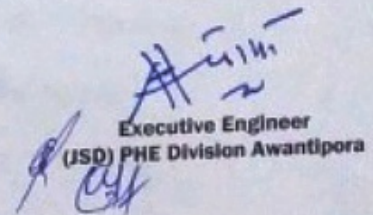

Copy to the:-

- 1). Mission Director, Mission Directorate Jal Jeevan Mission J&K Civil Secretariat Srinagar for favour of information
- 2). Chief Engineer PHE Kashmir Jal Shakti Department, Kashmir Srinagar for favour of information.
- 3). District Development Commissioner Pulwama (Chairperson DJJM) for favour of information.
- 4). Superintending Engineer Hydraulic Circle Pulwama H.Q Shopian (Member Secretary DJJM) for favour of information.
- 5). District Social Welfare Officer Pulwama (Member DJJM) for favour of information.
- 6). District Information Officer Pulwama (Member DJJM) for favour of information
- 7). Chief Education Officer Pulwama (Member DJJM) for favour of information
- 8). Chief Medical Officer Pulwama (Member DJJM) for favour of information
- 9). Divisional Forest Officer Pulwama (Member DJJM) for favour of information
- 10). Assistant Commissioner Development Pulwama (Member DJJM) for favour of information.
- 11). Chief Planning Officer Pulwama (Member DJJM) for favour of information
- 12). Assistant Executive Engineer Sub Division Tral for information. He will ensure the completion of work within the stipulated period strictly in accordance with approved proposals within allotted amount shall in no case exceed the allotted amount.
- 13). Assistant Accounts Officer PHE Division Awantipora for information
- 14). H/D Divisional Drawing Branch for information
- 15). Office File

Executive Engineer
(JSD) PHE Division Awantipora

